


SYNEGO


CARACTERISTICI TEHNICE

Material (PVC)	RAU-PVC 1406, nu contine cadmiu si Pb
Garnituri de etansare sudabile	RAU-PREN: thermoplastisches Elastomer
Grosimea peretilor exteriori	Clasa B conform DIN EN 12608 bzw. RAL 716
Sistemul de garnituri AD/MD	AD-2 garnituri perimetrale ; MD-3 garnituri perimetrale
Adancimea constructiva	80 mm
Numarul de camere de etansare	Rama : 7, Canat: 6
Numarul de camere in profilul de usa	5
Suprafata de apasare a garniturii	exterior 5 mm, interior 8 mm
Distanta axa feronerie	13 mm
Grosime max.pachet geam termoizolant	51 mm
Suprafata vizibila combinatie rama/canat	94 mm pana la 175 mm
Coeficientul de izolare termica U_f/U_D (conf. EN ISO 10077)	Var.MD – U_f pana la $0.94 \text{ W/m}^2 \text{ K}$ Var. AD – U_f pana la $1.0 \text{ W/m}^2 \text{ K}$ Usi – U_D pana la $1.2 \text{ W/m}^2 \text{ K}$
Coeficientul de izolare fonica	Pana la $R_{w,P} = 46 \text{ dB}$
Clasa de rezistenta la antiefractie ferestre (usi)	Pana la RC3 (RC2)conform DIN V ENV 1627
Etanseitatea la apa – ferestre (usi)	Pana la clasa 9A(pana la clasa 4A) conf. DIN EN 12208
Permeabilitatea la aer- ferestre /usi	Clasa 4 conform DIN EN 12207
Rezistenta la actiunea vantului-ferestra (usa)	Pana la clasa C5/B5 (pana la clasa C3/B3) conf.DIN EN 12210
Varianta color	Folie dekor imitatie lemn /uni; placarea cu Alu

Synego AD

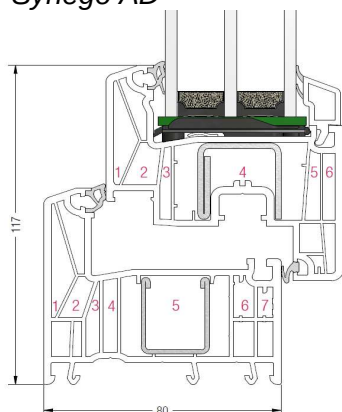

Synego MD

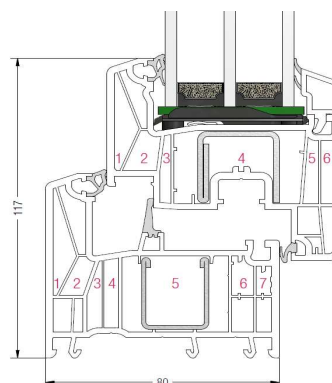

Departament Tehnic WS